

---


# Break Manual

SV Modular



June, 2020

## Break Users Manual

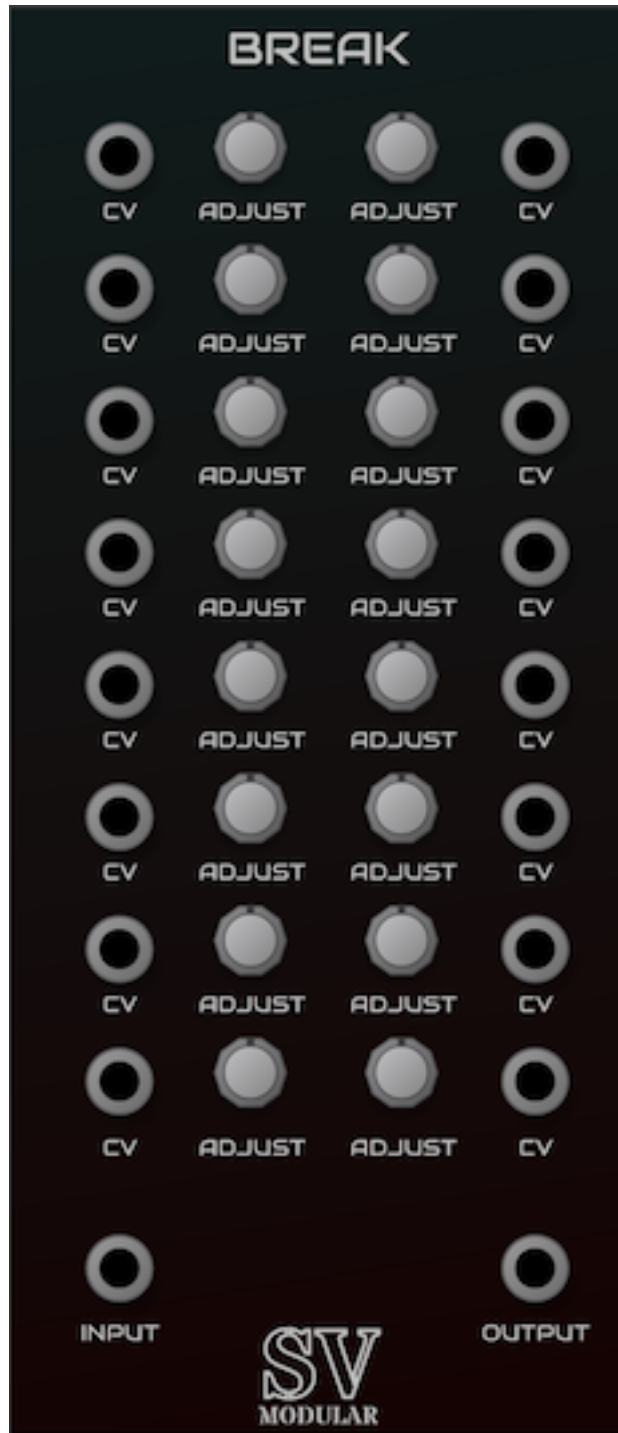

**Figure 1:** Break

Personal Modules Break is a simple, 16-voice polyphonic attenuation breakout.

It accepts a polyphonic input of up to 16 channels, allows for adjustment on each channel, combining the channels back as a single polyphonic output.

### **Input**

The input supports up to 16 polyphonic channels.

### **Output**

The output jack outputs the attenuated results as a single polyphonic signal. The same number of channels will be output as were input.

### **Adjust**

The adjust parameter allows you to adjust the channel voltage  $\pm 10$  volts. In addition, the CV input will act as additional voltage settings to the attenuation value. This means that if the parameter is set to  $-5$ , and the CV input is  $-10$ , then the voltage of the input is adjusted by  $-15$  volts.